


HORIZONTALNE BUŠILICE-GLODALICE

BORVERK SA POKRETNIM STUBOM

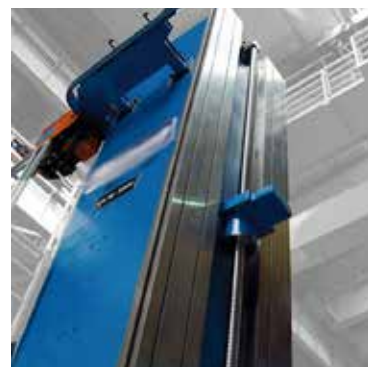

BORVERK SA POKRETNIM STUBOM

		HCW 2000	HCW 3000	HCW 4000
Prečnik glavnog vretena	(mm)	150 / 160 / 180	180 / 200 / 225	225 / 250 / 260
Hod po X osi (hod stuba)	(mm)	od 3000	od 3500	od 4000
Hod po Y osi (vertikalni hod vreteništa)	(mm)	2000 ÷ 5000	2500 ÷ 7000	3000 ÷ 9000
Hod po W / Z osi (hod glavnog vretena)	(mm)	1750 / 1250	2000 / 1400	2500 / 1500
Opseg broja obrtaja glavnog vretena	(min ⁻¹)	2 ÷ 3500	1 ÷ 3000	1 ÷ 2500
Snaga glavnog motora	(kW)	64 / 80	103 / 124	120

